

# MORNSUN®



- Universal 90 - 132VAC or 180 - 264VAC or 240 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- Low standby power consumption: <0.75W@230VAC
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- Operating altitude up to 5000m
- OVC III(designed to meet EN62477)
- 3 years warranty
- Safety according to UL62368, EN62477

## Selection Guide\*

Note:

- 1.\*Use suffix "C" for terminal with protective cover, suffix "Q" for bottom conformal coating and "QQ" for both sides conformal coating;
- 2.\*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current.
- 3.\*The product picture is for reference only. For details, please refer to the actual product.

## Output Specifications\*

MORNSUN®

2024.08.23-A/6

Page 1 of 6

# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

**MORNSUN®**

Line Regulation	Rated load		--	0.5	--		
Load Regulation	0% - 100% load	12V/15V	--	1.0	--		
		24V/36V/48V/54V	--	0.5	--		
Minimum Load			0	--	--		
Stand-by Power Consumption	25℃, 230VAC		--	--	0.75		W
Ripple & Noise*	20MHz bandwidth (peak-peak value)	12V/15V	--	180	--		mV
		24V/36V/48V	--	240	--		
		54V	--	300	--		
Temperature Coefficient	230VAC, 0℃ to 50℃		--	--	0.03	%/℃	
Hold-up Time	115VAC, rated load		--	12	--	ms	
	230VAC, rated load		--	16	--		
Short Circuit Protection*			Hiccup, continuous, self-recover				
Over-current Protection			130% - 220% Io, self-recover				
Over-voltage Protection	12V		≤16.2V	Hiccup, self-recover			
	15V		≤21.0V				
	24V		≤33.6V				
	36V		≤46.8V	Hiccup, self-recover or output voltage clamp			
	48V		≤63.0V				
	54V		≤70.0V				
Over-temperature Protection			Hiccup, self-recover				
Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to enclosed Switching Power Supply Application Notes for specific information; 2.*Recover time <5s after the short circuit disappear;							

### General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input - output	Electric strength test for 1min., leakage current <5mA		4000	--	--	VAC
	Input - ⊕	Electric strength test for 1min., leakage current <3mA		2000	--	--	
	Output - ⊕			500	--	--	
Insulation Resistance	Input - output	Environment temperature: 25±5℃ Relative humidity: <95%RH, non-condensing Testing voltage: 500VDC		100	--	--	M Ω
	Input - ⊕			100	--	--	
	Output - ⊕			100	--	--	
Operating Temperature				-40	--	+85	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		10	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	65	--	KHz
Power Derating		Operating temperature derating	-40℃ to -30℃	2.0	--	--	% /℃
			+50℃ to +85℃	2.0	--	--	
Leakage Current		264VAC	Touch leakage current	<0.5mA			
			Earth leakage current	<2.0mA			
Safety Standards		12V/15V/24V/36V/48V		GB4943.1, IS13252 (Part1), IEC60951-1 safety approved & IEC/BS EN/EN62368-1, EN60335-1, EN61558-1; Design refer to UL62368-1, EN62477-1			
		54V		GB4943.1 safety approved & IEC/BS EN/ EN62368-1, EN60335-1, EN61558-1; Design refer to UL62368-1, EN62477-1			
Safety Class				CLASS I			
MTBF		MIL-HDBK-217F@25℃		> 300,000 h			
Warranty				3 years			

**MORNSUN®**

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.23-A/6

Page 2 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### General Specifications

Case Material	Metal (AL5052, SGCC)
Dimensions	179.00mm x 106.00mm x 30.00mm
Weight	570g (Typ.)
Cooling Method	Forced air cooling

### Electromagnetic Compatibility (EMC)\*

Emissions	CE	CISPR32 EN55032	150kHz - 30MHz, CLASS A	
		CISPR32 EN55032	150kHz - 30MHz, CLASS B (See Fig. 1 for Wiring Diagram)	
	RE	CISPR32 EN55032	30MHz - 1GHz, CLASS A	
		CISPR32 EN55032	30MHz - 1GHz, CLASS B (See Remark 1*)	
Immunity*	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	Perf. Criteria A
	RS	IEC/EN61000-4-3	80MHz - 1GHz 10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 4\text{KV}$ , (5 or 100)kHz	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ /line to PE $\pm 4\text{KV}$	Perf. Criteria A
		IEC/EN61000-4-5	line to line $\pm 4\text{KV}$ /line to PE $\pm 6\text{KV}$ (See Fig. 1 for Wiring Diagram)	Perf. Criteria A
	PFMF	IEC/EN61000-4-8	30A/m	Perf. Criteria A
	CS	IEC/EN61000-4-6	0.15MHz - 80MHz 10Vr.m.s	Perf. Criteria A
	Voltage dips	IEC/EN61000-4-11	0%, 70%	Perf. Criteria A
	Voltage interruption	IEC/EN61000-4-11	0% of 230Vac, 0Vac, 5000ms	Perf. Criteria B

#### Remark:

1. \*The power supply should be regarded as a part of the system, and the radiation emissions can be achieved by adding a filter FC-L06Wx and adding a magnetic ring at the output or shielding measures.

2. \*The power supply does not meet the requirements of harmonic current stipulated in EN61000-3-2; This power supply is not suitable for the following situations.

1) The terminal equipment is used in the European Union.

2) The terminal equipment is connected to public mains supply with 220VAC or greater rated nominal voltage that mandatory to meet the requirements of EN61000-3-2.

3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.

4) The power supply belong to a part of lighting system.

In addition, the power supply can be used in the following terminals which do not need to meet EN61000-3-2;

(1) Professional equipment with total fixed input power greater than 1000W;

(2) symmetrical controlled heating element with rated power less than or equal to 200W.

3. \*If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.



4. \*perf. Criteria:

A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention;

C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

### Product Characteristic Curve

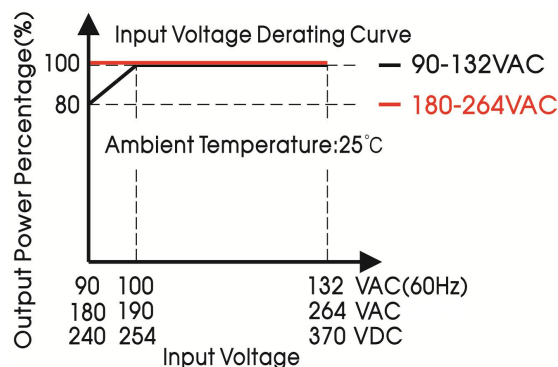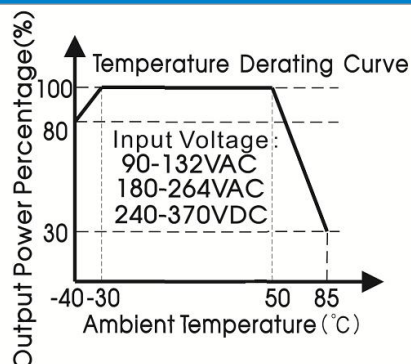

#### Notes:

1. With an AC input voltage between 90 - 100VAC (60HZ) and a DC input between 240 - 254VDC the output power must be derated as per the temperature derating curves;



2. This product is suitable for applications using forced air cooling; for applications in closed environment please consult Mornsun FAE.;

3. When the input voltage is less than 110VAC with 30% load after long-term storage at low temperature -40°C, under such extreme conditions, it is recommended to start with <30% load before full load.

# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

**MORNSUN®**

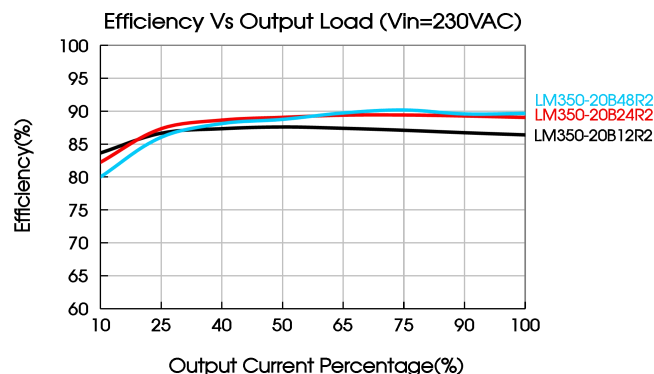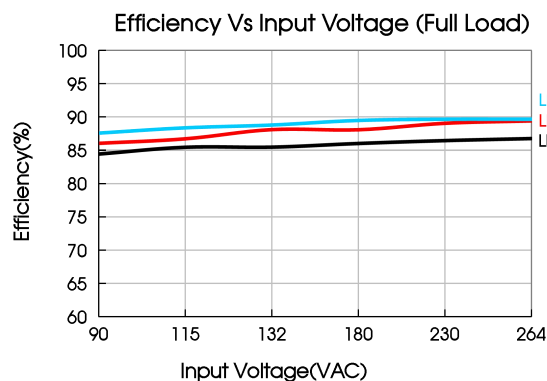

### FC-L06W2 & LM350-20BxxR2 Wiring Diagram



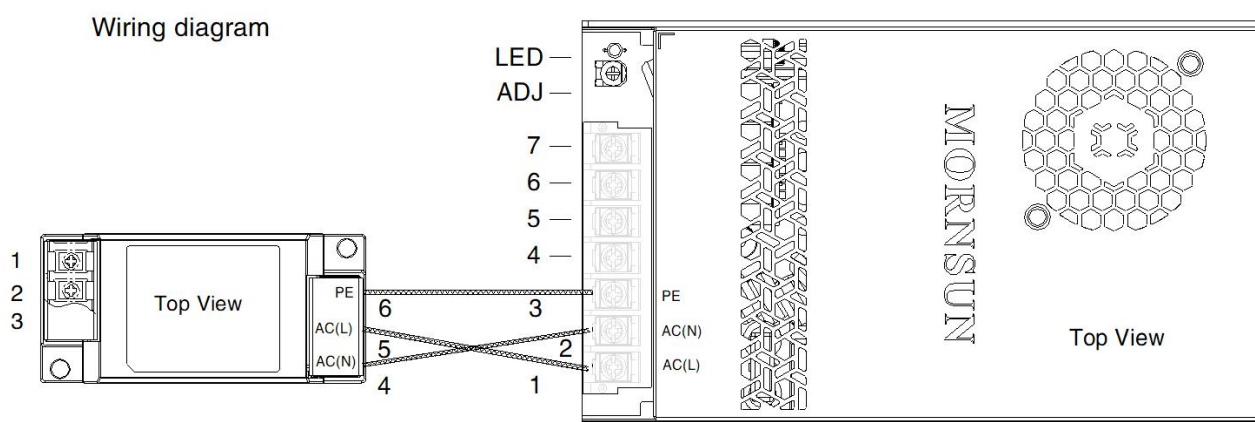


Fig. 1: EMC application circuit with higher requirements

### Dimensions and Recommended Layout

#### LM350-20BxxR2、LM350-20BxxR2-Q Series

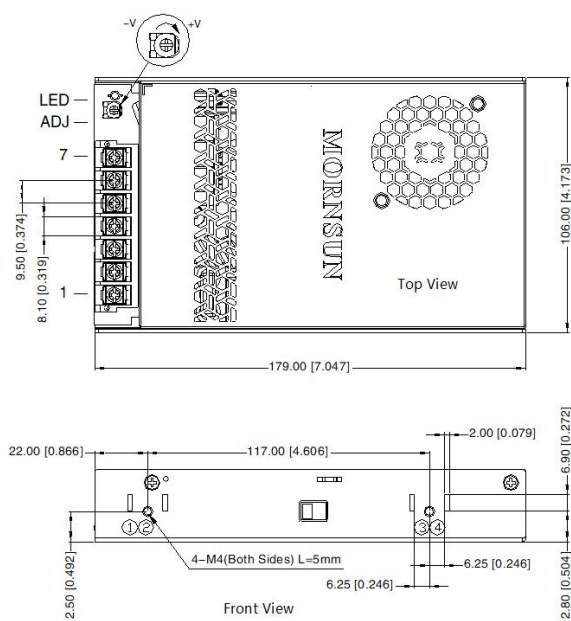

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

Switch	AC Input	DC Input
	90-132VAC	---
	180-264VAC	240-370VDC

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.23-A/6

Page 4 of 6


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



# AC/DC 350W Enclosed Switching Power Supply

## LM350-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

**MORNSUN®**

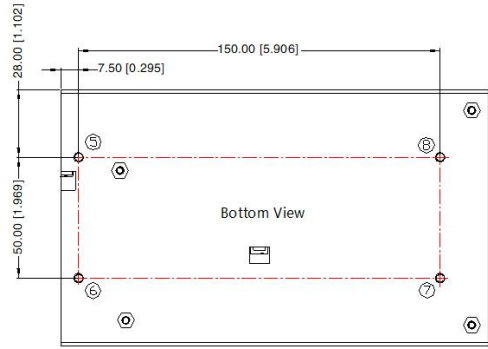

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M4	5mm	0.9N · m
⑤ - ⑧	M4	3mm	0.9N · m

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 12V, 15V: 14-10AWG


24V, 36V: 18-10AWG

48V, 54V: 20-10AWG

Pin1-7 connector tightening torque: M3.5, 0.8N · m max.



General tolerances:  $\pm 1.00[\pm 0.039]$

### LM350-20BxxR2-C Series

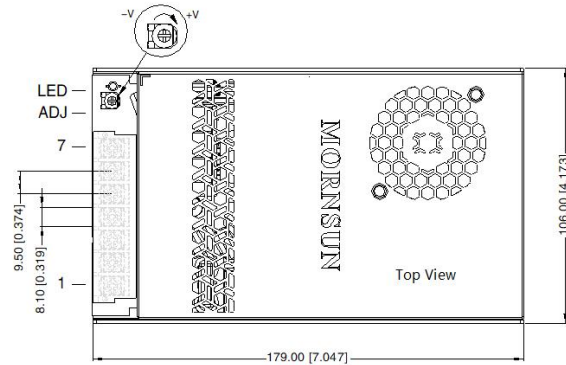

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

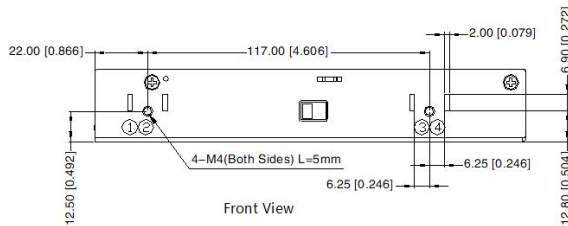

Switch	AC Input	DC Input
115V	90-132VAC	---
230V	180-264VAC	240-370VDC

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M4	5mm	0.9N · m
⑤ - ⑧	M4	3mm	0.9N · m

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 12V, 15V: 14-10AWG

24V, 36V: 18-10AWG

48V, 54V: 20-10AWG

Pin1-7 connector tightening torque: M3.5, 0.8N · m max.

General tolerances:  $\pm 1.00[\pm 0.039]$

**MORNSUN®**

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.08.23-A/6

Page 5 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

